

- General Specifications/规格:
1. Panel Size/板的尺寸: 21" x 24"(Max); 18" x 24"(Min)
  2. Panel Thickness/板的厚度: 0.1mm ~ 3mm
  3. Machine Size/设备尺寸: 2510mm(L) x 2270mm(W) x 2150mm(H)

## TS71048


TS71048 functions as Loader and Unloader of PWB panels as thin as 0.1mm at tact time of about 5 panels per minute. It accepts Trolleys with horizontal trays and interfaces to other processes via belt conveyor at pass height of about 950mm. Advantage of this is reduced scratches on the PWB panels and contactless centering.

### Machine Specifications

Model	TS71048
Panel Size	18" x 24"(Min) ~ 21" x 24"(Max)
Panel Thickness	0.1mm ~ 3mm
Cycle time	4 ~ 5 panels per minute
Conveyor Pass Line	795 ± 30mm
Loading Position	950 ± 30mm
Interleave	Two Trolley
Electrical Connection	AC415V, 3 phase, 50Hz, 5KW
Air Supply	6 Bar
Machine Weight	1500 Kg per unit
Machine Size	2510mm(L) x 2270mm(W) x 2150mm(H)

### Options

Safety Feature	Swing door with safety sensor ; Sliding door with safety sensor ; Curtain sensor
Conveyor Type	Flat belt 7 x 25mm with side support; Roller Φ60mm
PCB Stopper	Single position ; Double position
PCB Centering	Centering fingers; Contactless Centering

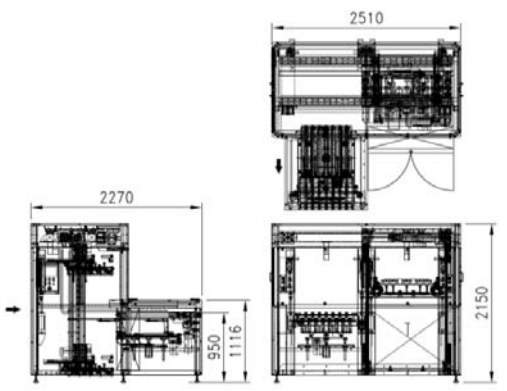

Your Ideal Partner in Automated Engineering Equipment  
 Email: [transystem@pacific.net.sg](mailto:transystem@pacific.net.sg)